


ITS-4480-MV

Integrated Transformer Station for 1500V Utility PV Plant (For SP-350K-H1 String inverter)

- Safety**
 - MV and LV isolated, with independent control room
 - Integrated smoke sensing alarm
 - LV copper busbar fully enclosed protection design
- Low system cost**
 - Convenient for large block size PV plant
 - Integrated MV transformer and switchgear
- High reliability**
 - Suitable for all kinds of harsh environments
 - All device compliance with international standards
- Easy O&M**
 - Integrated current and voltage monitoring function for online analysis and trouble shooting



Circuit Diagram

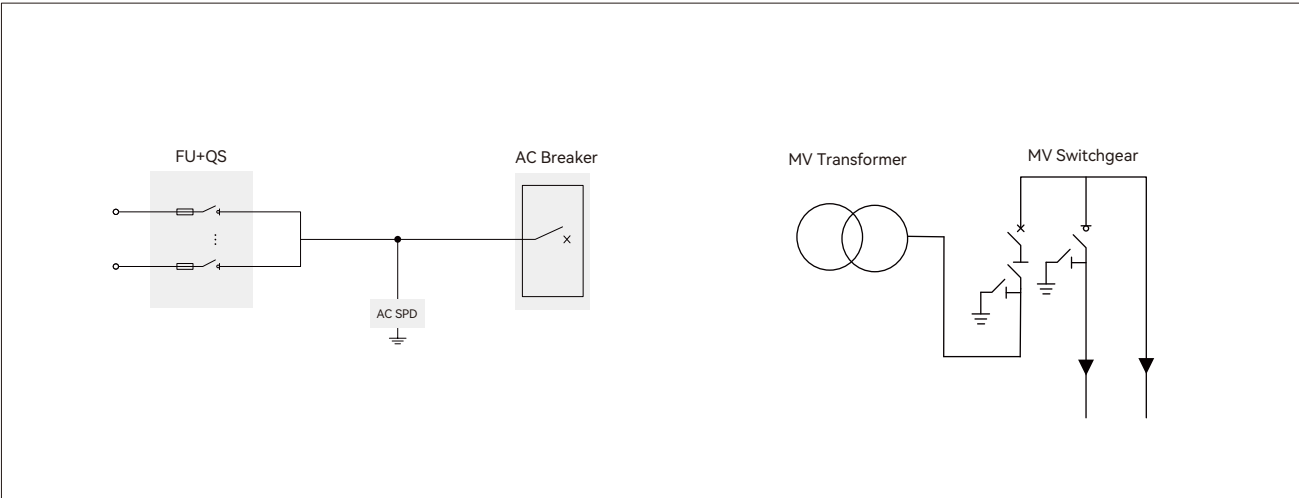

Model		ITS-4480-MV
Input		
AC power	4480kVA@40°C/4928kVA@30°C	
Max. Inverters Quality	14	
Rated Input voltage	800V	
Main switch specification	4000A/800Vac/3P, 1pcs	
Disconnecter specification	260A/800Vac/3P, 14pcs	
Fuse specification	400A/800Vac/1P, 42pcs	
Output		
Rated AC output Voltage	20-35kV	
Transformer Type	Oil-immersed	
Transformer Vector Group	Dy11	
Rated grid frequency/range	50Hz/45~55Hz,60Hz/55~65Hz	
Transformer Tappings	±2x2.5%	
Impedance	7% (±10%)	
MV Switchgear Type	SF6 Gas Insulated, 3 feeders	
Protection		
AC input protection	Fuse+disconnecter	
Transformer protection	Oil-temperature, Oil-level, Oil-pressure and Buchholz	
AC MV output protection	Circuit breaker	
LV Over voltage protection	Type II (Optional: Type I+II)	
MV Relay Protection	50/51, 50N/51N, (Optional: 50G/51G)	
Internal arcing fault	IAC AFL 20kA/1s	
General Data		
Auxiliary power supply	Standard: 5kVA, Optional: Max. 40kVA	
Degree of protection	IP54	
Temperature	-30°C~+60°C	
Allowed humidity (non condensing)	0~95%	
Transformer Cooling mode	ONAN (Oil Natural Air Natural)	
Max. operating altitude	2000m(standard) />2000m (Optional)	
Communication port	RS485/Ethernet	
Certificates (more available on request)	IEC 60076, IEC 62271, IEC 61439	
Dimensions (W×H×D)	6058x2896x2438mm	
Weight	24T	